JSPR

JEWELS DOT CONNECTION

INSTALLATION

1.

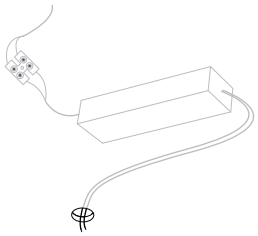

Drill 10 mm hole in the ceiling and pull through low voltage wires.

NOTE: This low voltage wire will come from a transformer which is connected to house electric wire.

2.



Carefuly uncoil the pendant cables. Connect pendant to the low voltage house wire. To simplify the installation use splices and heat shrink.

3.

Tuck wires inside the hole and secure the jack socket to the ceiling with screws (provided).

4.



Screw on the cover ring.

5.

Create desired pendant lenght by carefully pushing or pulling the cable through.

6.

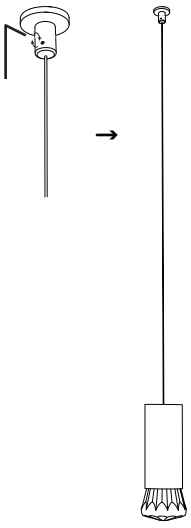

Once the desired lenght is created tighten the cable using a hex key. Be careful not to tighten it too much which might cause shortage and damage the pendant.

CONTACT

JSPR
T +31 (0) 40269211
INFO@JSPR.EU
WWW.JSPR.EU

JSPR

JEWELS SQUARE BASE

INSTALLATION

1.

Mark holes in the ceiling based on the base plate size.

NOTE: all base plate measurements are inclosed in the next pages.

2.

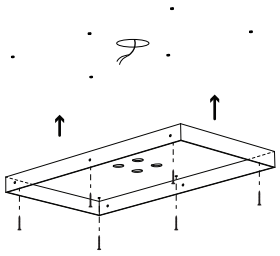

Attach the base plate to the ceiling with dowels and screws (by client). Pull electric house wire through any of the center holes.

3.

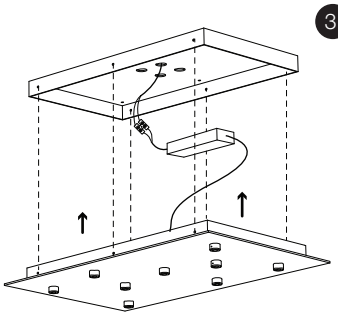

Connect the transformer (230 V/110 V) to the electricity network and place the cover plate over the base plate, tucking wires and transformer inside.

4.

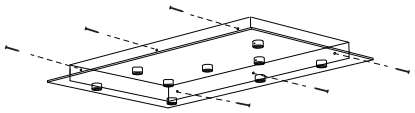

Attach cover plate to the base plate with 6 screws (provided).

5.

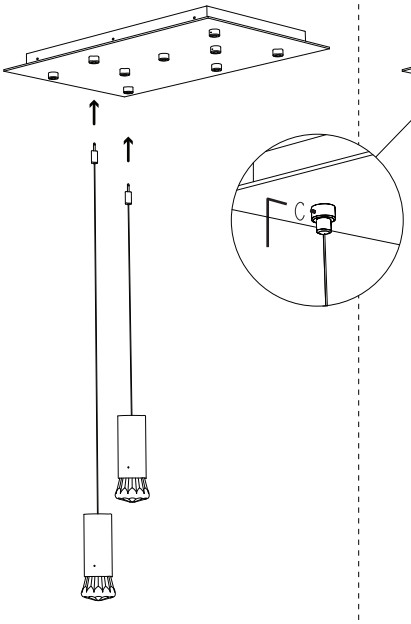

Carefully uncoil the pendant cables and plug the lamps in the cover plate sockets.

Arrange lights in any desired composition.

6.

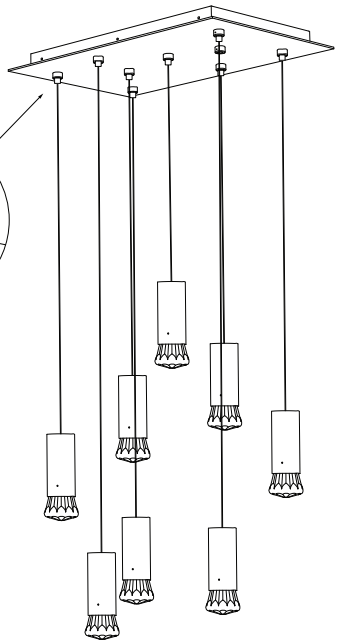

Once all lamps are plugged, tighten the connections with hex key (inclueded). Turn the fixture on.

If any lamps are flicking or not shinning adjust the jack plug.

CONTACT

JSPR
T +31 (0) 40269211
INFO@JSPR.EU
WWW.JSPR.EU

JSPR

JEWELS ROUND BASE

INSTALLATION

1.

Mark holes in the ceiling based on the base plate size.

NOTE: all base plate measurements are inclosed in the next pages.

2.



Attach the base plate to the ceiling with dowels and screws (by client). Pull electric house wire through any of the center holes.

3.



Connect the transformer (230 V/110 V) to the electricity network and place the cover plate over the base plate, tucking wires and transformer inside.

4.



Attach cover plate to the base plate with 6 screws (provided).

5.

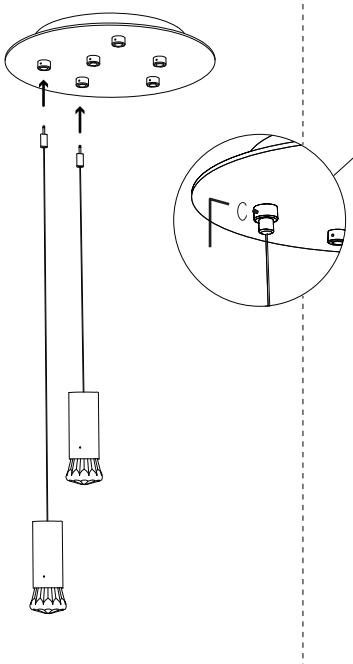

Carefully uncoil the pendant cables and plug the lamps in the cover plate sockets.

Arrange lights in any desired composition.

6.

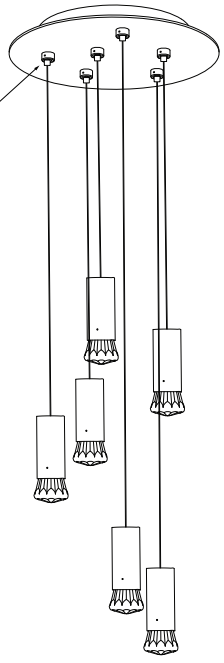

Once all lamps are plugged, tighten the connections with hex key (inclueded). Turn the fixture on.

If any lamps are flicking or not shinning adjust the jack plug.

CONTACT

JSPR
T +31 (0) 40269211
INFO@JSPR.EU
WWW.JSPR.EU

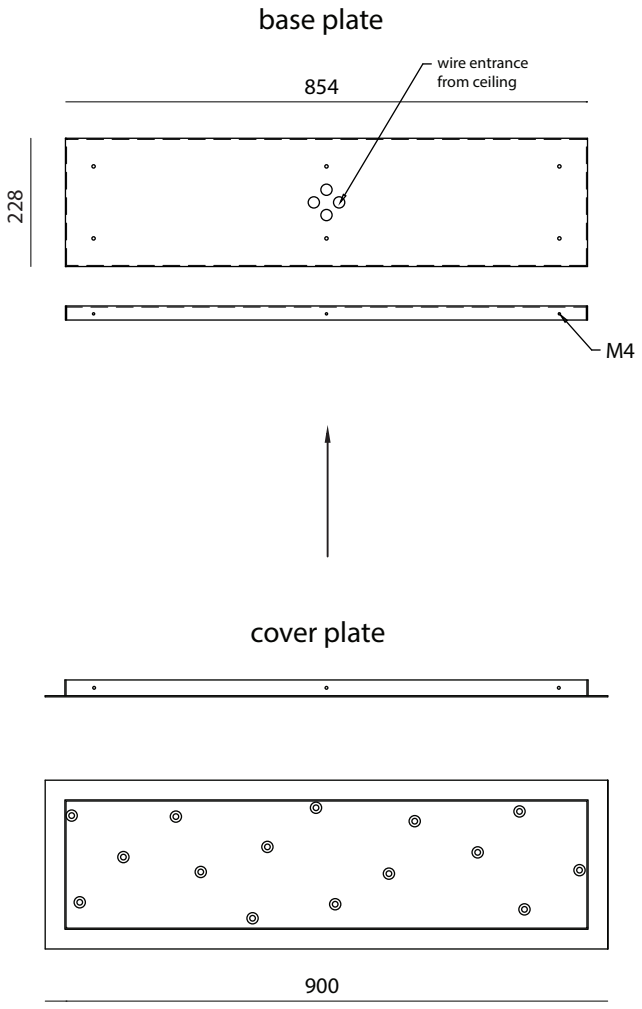

CEILING PLATE
(15 pendants)

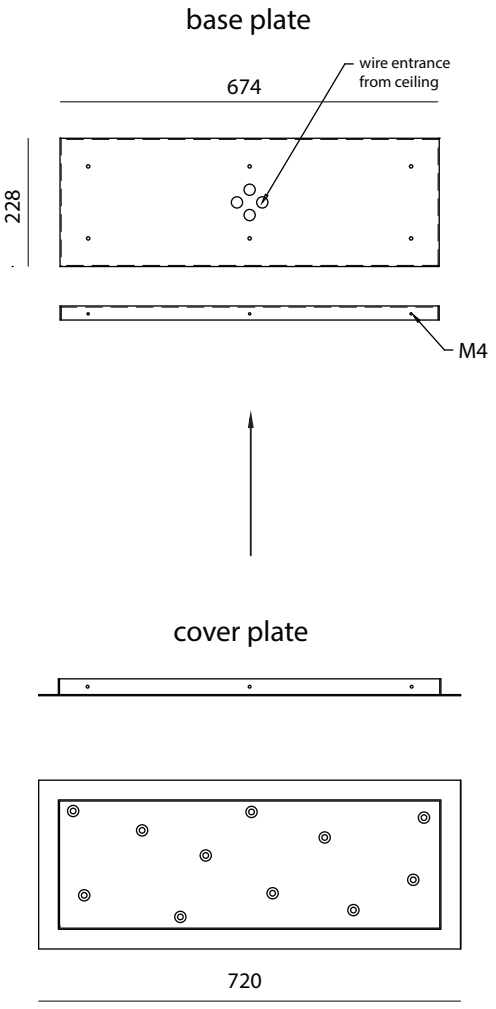

CEILING PLATE
(11 pendants)

CONTACT

JSPR
T +31 (0) 40269211
INFO@JSPR.EU
WWW.JSPR.EU

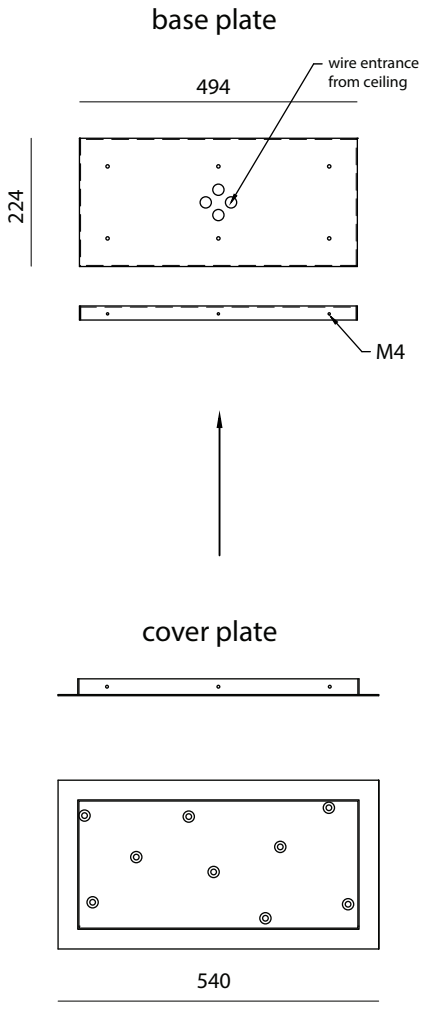

CEILING PLATE
(9 pendants)

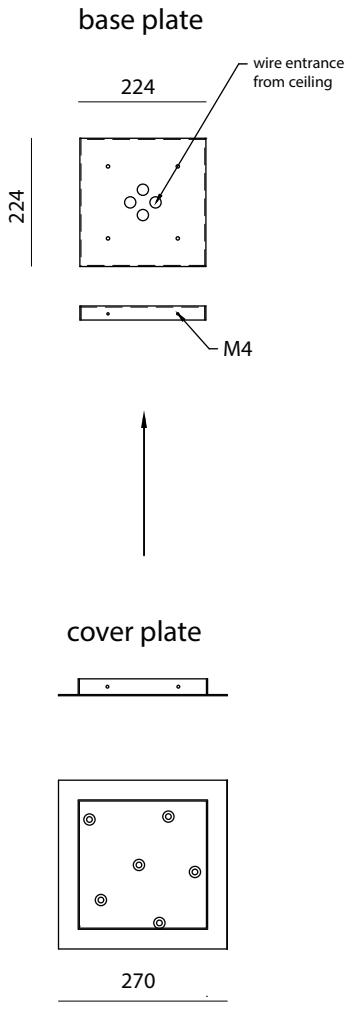

CEILING PLATE
(6 pendants)

CONTACT

JSPR
T +31 (0) 40269211
INFO@JSPR.EU
WWW.JSPR.EU

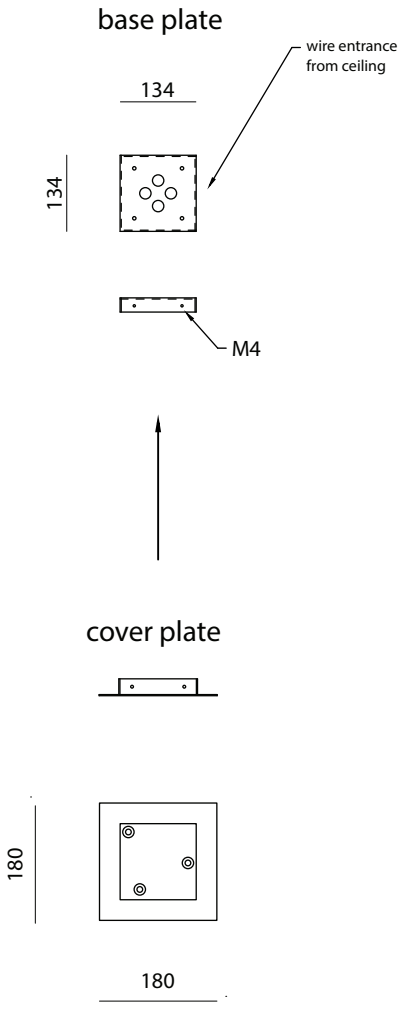

CEILING PLATE
(3 pendants)

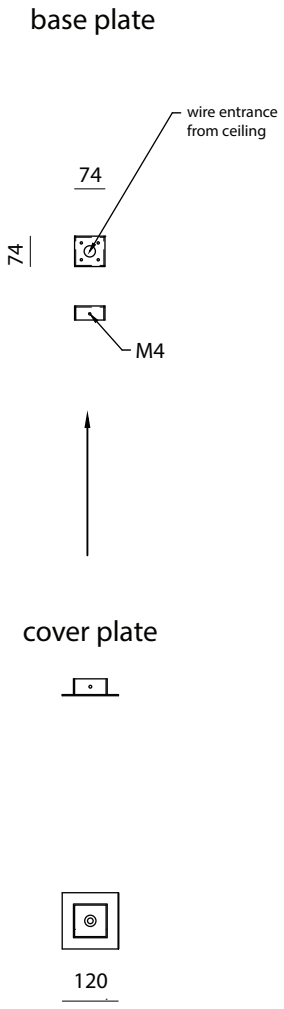

CEILING PLATE
(1 pendant)

CONTACT

JSPR
T +31 (0) 40269211
INFO@JSPR.EU
WWW.JSPR.EU

base plate

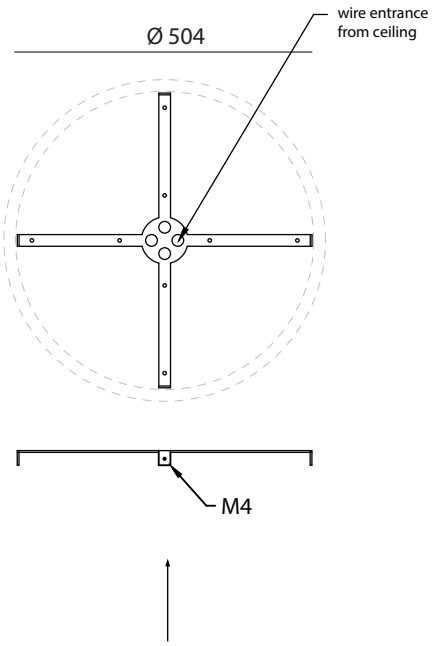

cover plate

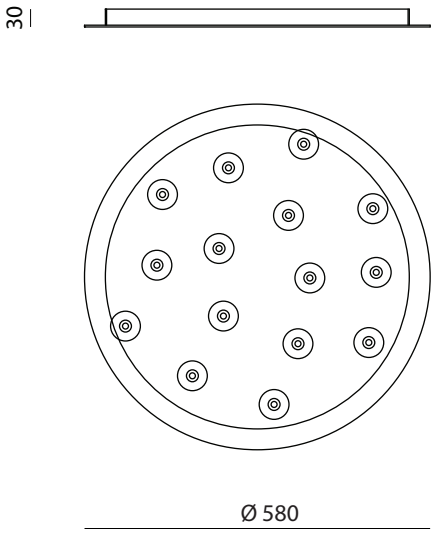

CEILING PLATE
(15 pendants)

base plate

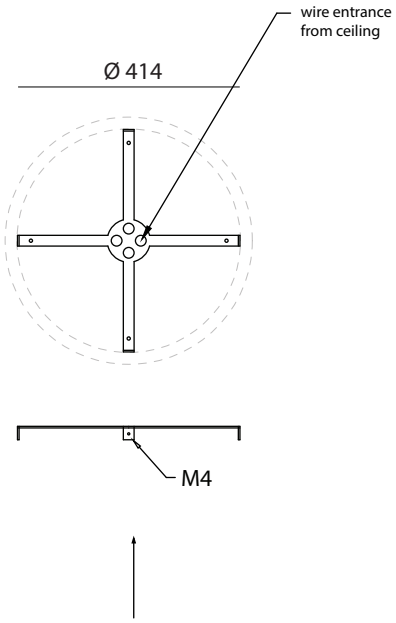

cover plate

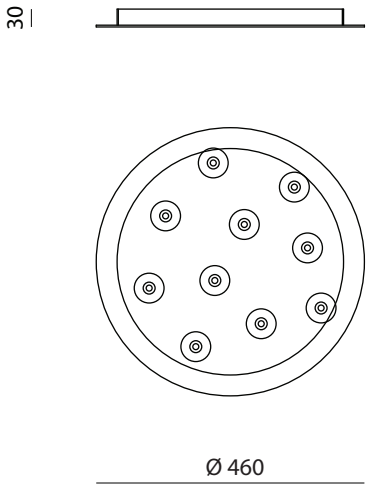

CEILING PLATE
(11 pendants)

CONTACT

JSPR
T +31 (0) 40269211
INFO@JSPR.EU
WWW.JSPR.EU

base plate

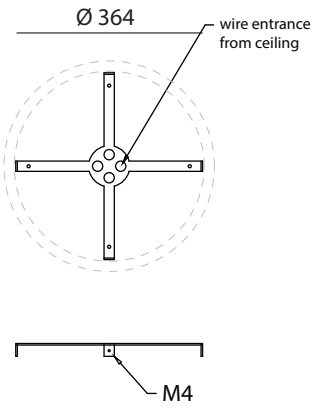

cover plate

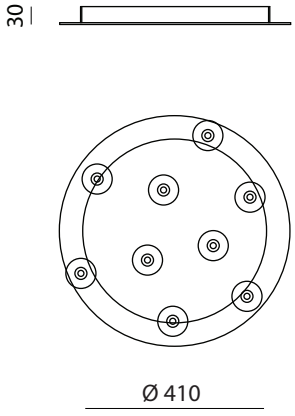

CEILING PLATE
(9 pendants)

base plate

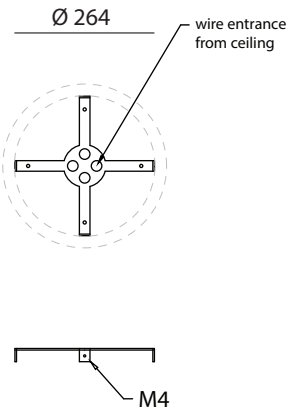

cover plate

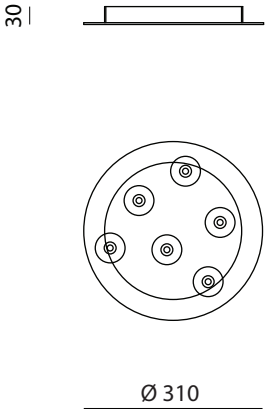

CEILING PLATE
(6 pendants)

CONTACT

JSPR
T +31 (0) 40269211
INFO@JSPR.EU
WWW.JSPR.EU

JSPR

JEWELS CEILING PLATES

MEASUREMENTS

base plate

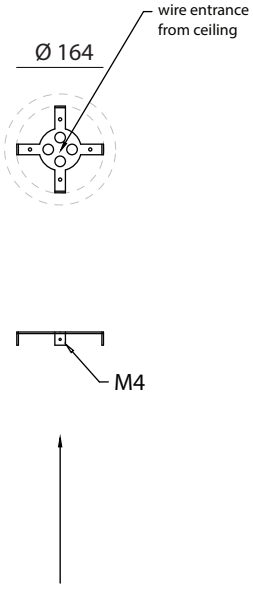

CEILING PLATE
(3 pendant)

base plate

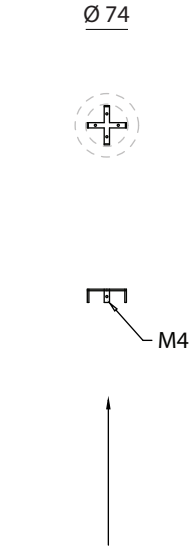

CEILING PLATE
(1 pendant)

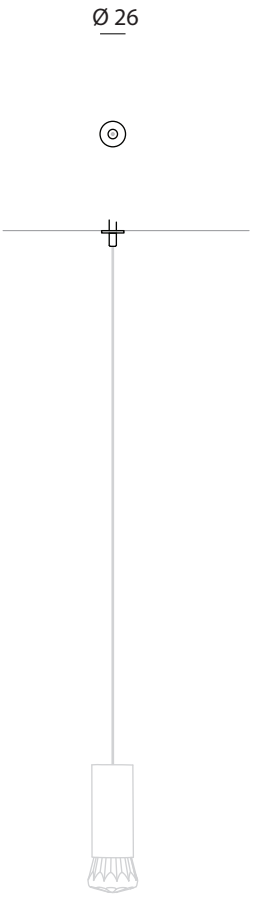

DOT
CONNECTION

CONTACT

JSPR
T +31 (0) 40269211
INFO@JSPR.EU
WWW.JSPR.EU

JSPR

JEWELS

LED / BULB REPLACEMENT

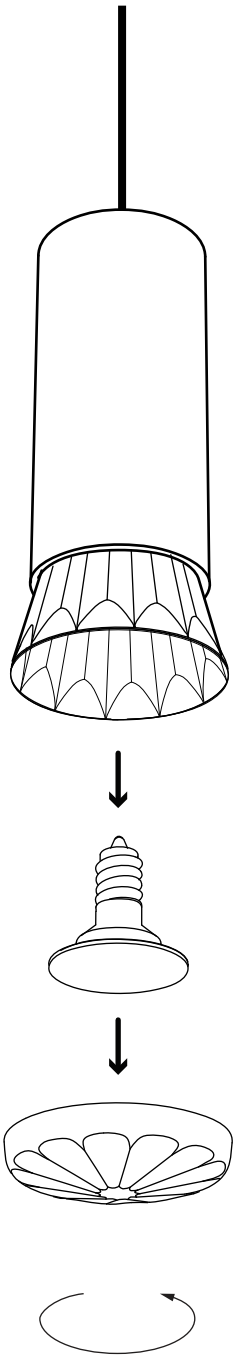

Gently unscrew the top cap and replace LED/bulb.

Fitting : E14

CONTACT

JSPR
T +31 (0) 40269211
INFO@JSPR.EU
WWW.JSPR.EU